


1



將化油器的彎管，改為向後傾斜(約與側板同角度)。
Please bend the pipe that is connected to the carburetor to be parallel to the carbon fiber plate. (The pipe and the plate should have about the same angle)

2

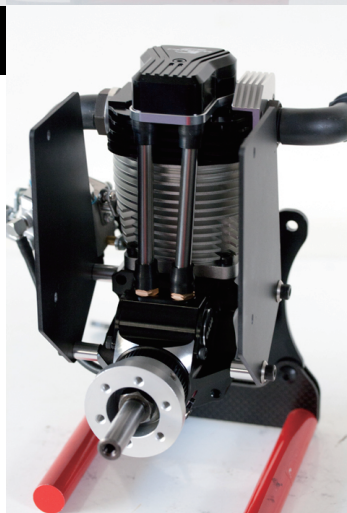

將左右側板鎖至引擎本體。
Secure the plate to both side of the engine using the screws provided.

3



將皮帶裝在引擎及風扇的皮帶輪上。
Install the fan belt onto the engine and the belt gear.

4



將皮帶繃緊後，鎖緊風扇組。
Pull the fan upward which will tighten the fan belt and then lock the fan in place using the screws provided.